

JAC MOTORS TOUGH TRUCKS AT AFFORDABLE RATES

SAFE AND RELIABLE

Reliability verification

More than **50000** km test mileage
Verified on mountain road, highway, urban road,
and special enhanced testing road

**EXTRA
SAFETY**



ESC

HSA

ASR



Safe and
reliable



Easy to drive
and comfortable



Multi scene
application



Economical and
energy-saving



N50
GVW: 4800KG
4 Wheelers

N80
GVM: 7500KG
6 Wheelers

N120
GVM: 12000KG
6 Wheelers

5
YEARS
WARRANTY


OR
300,000KM
*Whichever comes first with Terms & Conditions Apply.

FREE
SERVICE PROGRAM
up to 100,000KM


TECHNICAL SPECIFICATION						
MODEL NAME		N50		N80		N120
PERFORMANCE	Gross Vehicles Weight (Kg)	4800		7500		12000
	Curb Weight (Kg)	1984	2054	2950	2990	3950
	Fuel tank capacity	100L		130L		200L
	Max speed (Km/h)	100		100		100
	Maximum Gradeability (%)	≥30		≥30		≥30
ENGINE	Model	HFC4DE1-1C		ISF3.8s4R154		B4.5EV 210
	Emission levels	Euro IV. Common Rail+EGR		Euro IV. Common Rail+EGR		Euro V in line-4, ind-cooler turbocharged, diesel
	Max rated power (PS@rpm)	122@3200		154@2600		210@2300
	Max. Torque (Nm@rpm)	285@1800-2600		500Nm@1200-1900		740@1200 1800
	Displacement (cc)	2746		3760		4460
TRANSMISSION	MT	5 MT		6 MT		6 MT
SUSPENSION	Front	Multi Leaf Spring with Dual Acting Shock Absorber				
	Stabilizer bar	•		•		—
	Rear	Multi Leaf Spring with Dual Acting Shock Absorber				
	Stabilizer bar	N/A		•		—
CHASSIS FRAME	Frame external width Wf (mm)	700/750/700		935/850		877/865
	Frame Section Size (mm)	18065×4.5		214×70×5		230×75×6
AXLE	Front Axle Capacity (Design) KG	2000		3100		3800
	Rear Axle Capacity(Design) KG	3000		6600		8700
TIRE	Model	7.00R16		215/75R17.5 16PR		255/70R22.5
BRAKE	Brake Type	Hydraulic brake		air brake		air brake
	Drum Type	Front Disc/ Rear Drum		Front Drum/ Rear Drum		Front Drum/ Rear Drum
	Exhaust assisted braking	•		•		•
SAFETY DEVICE	Reversing alarm	•		•		•
	ABS(Anti-lock Braking System)	•		•		•
	ASR(Acceleration Slip Regulation)	—		—		—
	HSA (Hill-Start Assist)	—		•		—
	ESC	—		•		—
STEERING	Power Assist, Recirculating Ball Type	•		•		•
ELECTRICAL	Battery	12V 160 A-h		24V 80A-h		24V 2x80A-h
	Alternator	14.5V 120A		28V 70A/90A		28V 70A
DIMENSION CAB CHASSIS)	Overall Length (mm)	5440×1725×2250	5845×1725×2250	7033×2116×2300	8005×2116×2300	8310×2345×2520
	Wheelbase (mm)	2850	3365	3845	4475	4700
	Front/Rear Overhang (mm)	1110/1520	1110/1370	1110/2078	1110/2260	1180/2565
	Front/Rear Tread (mm)	1440/1627		1710/1650		1860/1803
Others	Cruise control speed	•		•		•
	Central lock	•		•		•

Disclaimer: The Manufacturer reserves the right to make changes to technical parameters & designs or to discontinue models without prior notice

JAC MOTORS

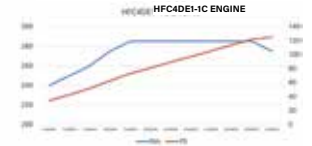

JAC ALL NEW N50
HFC4DE1-1C
EURO 4
Displacement : 2746cc
Max Output (Gross) : 122ps@3200rpm
Max Torque : 285Nm@1800-2600rpm

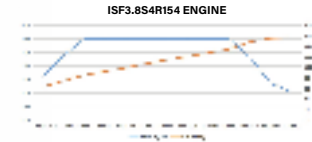

JAC ALL NEW N80
CUMMINS ISF3.8
EURO 4
Displacement : 3760cc
Max Output (Gross) : 154ps@2600rpm
Max Torque : 500Nm@1200-1900rpm




JAC ALL NEW N120
CUMMINS B4.5EV210
EURO 5
Displacement : 4460cc
Max Output (Gross) : 210ps@2300rpm
Max Torque : 740Nm@1200-1800rpm

Flexible application for variety truck body



Authorized Dealer:

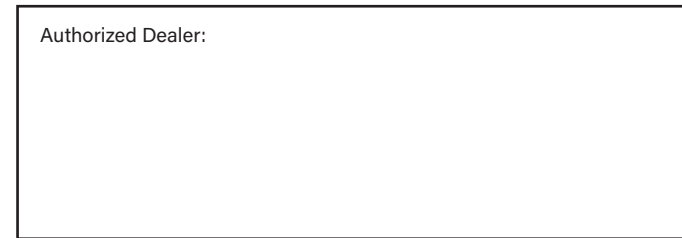

JAC AUTO (MALAYSIA) SDN BHD (Co. No. 202301036471 (1530394-A))

Lot 5 Jalan Utarid U5/15 Seksyen U5,
40150 Shah Alam, Selangor D.E

Tel: 011-3323 3662

Website: www.jacmotors.my